



TECHNICAL DATA / FEATURES

- dimensions: 271x44x36
- luminous flux of the LED module: 1400 lm
- luminous flux of the lamp: 1100 lm
- maximum power: 19W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 10 x LED
- colour temperature: 5000-7000K
- light distribution angle: 30° x 7°
- IP rating: IP67, IP69K
- work temperature: -40°C - +80°C
- housing's material: aluminium
- lens' material: plastic
- built-in connectors: -
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

Especially recommended for fire trucks, ambulances, police cars, campers, trailers, lockers.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.



The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

They can be mounted horizontally, on any flat element of a vehicle body.

It is possible to install needed connectors on wire (on request).

DIMENSIONS

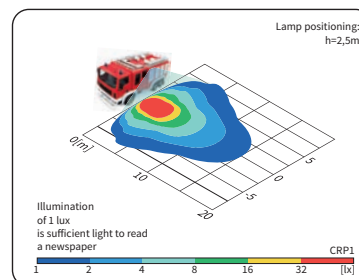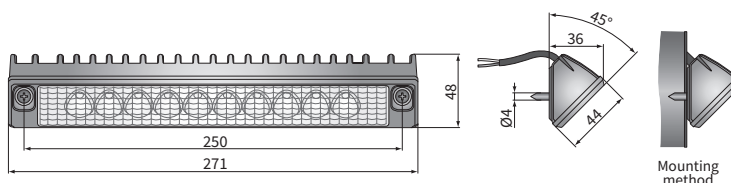

Cat. number	Hella Catal. No.	Luminous flux		IP rating	IP66	IP67	IP69K	housing	black	white	red	amber	Accessories	LED module 12V-24V	cable 0,5 m	cable 8 m	Connectors	AMP Faston 250	Deutsch DT	AMP SuperSeal 1,5	
		1400 lm	800 lm																		
CRP1.54600	1GD 996 098-001	✓				✓	✓		✓					✓	✓						
CRP1.54601		✓				✓	✓			✓				✓	✓						
CRP1.54602		✓				✓	✓				✓			✓	✓						
CRP1.54603		✓				✓	✓					✓		✓	✓						