



TECHNICAL DATA / FEATURES

- dimensions: 104x120x81, 120x104x81
- luminous flux of the LED module: 2000 lm, 1500 lm
- luminous flux of the lamp: 1600 lm, 1200 lm
- maximum power: 22W, 18W
- nominal voltage: 12V-24V DC
- permissible power supply voltage: 10.5V-30V DC
- source of light: 4 x LED
- colour temperature: 5700-7000K
- light distribution angle: 4°
- IP rating: IP67, IP69K, IP66
- work temperature: -40°C - +80°C
- housing's material: aluminium/plastic
- lens' material: plastic
- built-in connectors: AMP Faston 250, Deutsch DT, AMP SuperSeal 1.5
- other: protection:
 - against overheating
 - against reverse polarisation



ADDITIONAL INFORMATION

The lamps comply with EMC Directive 2004/108/EC. They do not emit electromagnetic interference as well as they are resistant to it's influence.

Correct polarity required.

Mounting: as a freestanding on body panels.

The bracket parts are made of Inox steel.


Different colours of the frame are available: i.e. red, yellow (option).

It is possible to install needed connectors for a version with cable (on request).

Useful parts while installing:

- deutsch plug DT06-2S 2-pin - cat. No. A.07135
- AMP SuperSeal 1,5 plug 2-pin - cat. No. A.07137
- AMP Faston 250 plug 2-pin - cat. No. A.07138

DIMENSIONS

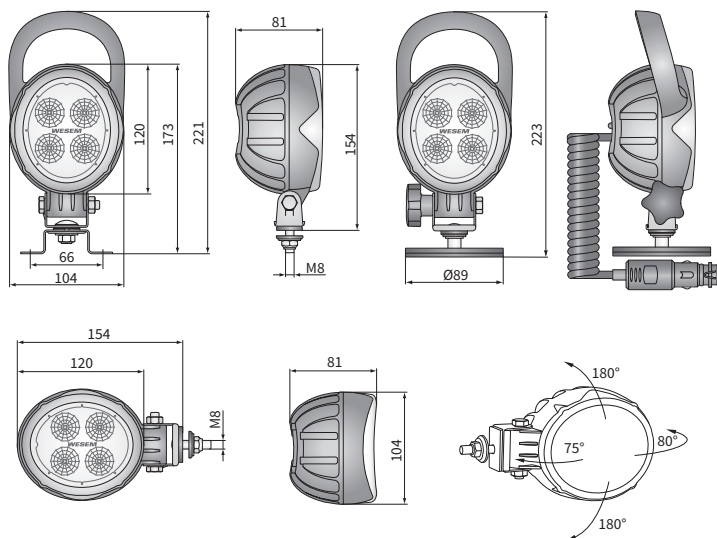

Cat. number	Luminous flux			IP rating	IP66	IP67	IP69K	Accessories		Mounting method	Bracket	M8	omega	Connectors				Packaging / pc	carton box
	2000 lm	1500 lm						LED module 12V-24V/ cable 0,5 m	installed vertically up					suspended	side	AMP Faston 250	Deutsch DT		
CRV2D.56200	✓					✓	✓	✓	✓	✓	✓							2	1
CRV2D.56206	✓					✓	✓	✓	✓	✓	✓			✓				2	1
CRV2D.56207	✓						✓	✓	✓	✓	✓				✓			2	1
CRV2D.56208	✓						✓	✓	✓	✓	✓					✓		2	1
CRV2D.56203	✓						✓	✓	✓	✓	✓						✓	2	1
CRV2B.58700		✓					✓	✓	✓	✓	✓							2	1
CRV2B.58706		✓				✓		✓	✓	✓	✓			✓				2	1
CRV2B.58707		✓					✓	✓	✓	✓	✓			✓				2	1
CRV2B.58708		✓					✓	✓	✓	✓	✓				✓			2	1
CRV2D.56240	✓						✓	✓	✓	✓	✓							2	1
CRV2D.56247	✓						✓	✓	✓	✓	✓				✓			2	1
CRV2B.58740		✓					✓	✓	✓	✓	✓							2	1
CRV2B.58747		✓					✓	✓	✓	✓	✓				✓			2	1

