



TECHNICAL DATA / FEATURES

- dimensions: 100x100x91
- source of light: H3
- maximum power: 70W
- nominal voltage: 12V-24V DC
- optics: standard
- light distribution angle: 63° x 45°
- IP rating: IP66, IP69K
- housing's material: plastic
- housing's colour: black
- lens' material: glass
- built-in connectors: AMP Faston 250
- other: shock absorber
handle (option)
switch (option)



ADDITIONAL INFORMATION

Popular among the users lamps with multiple application possibilities.

Work lamps are used to illuminate working space near vehicles, tractors, slow-moving machines and any other places where indicated voltage is available.

A wide range of connectors and brackets. They can be installed in any position.

Useful parts while installing:

AMP Faston 250 plug 2-pin - cat. No. A.07138

Replacement parts:

switch - cat. No. WYL1.46300




hermetic grommet - cat. No. A.28500

Equivalents for Hella:

A - 1GA 007 506-451 C - 1GA 007 506-091

B - 1GA 007 506-011 D - 1GA 007 506-021

DIMENSIONS

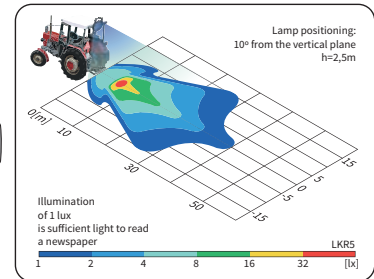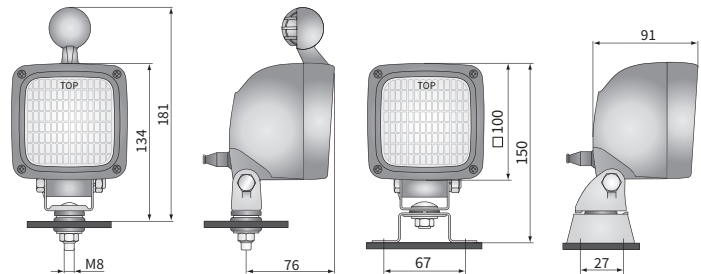

Cat. number	IP rating		Accessories						Bracket			Equivalents		
	IP66	IP69K	shock absorber	bulb H3 12V	bulb H3 24V	handle	switch	grommet	hermetic grommet	AMP Faston connector	M8	omega	Hella	Hella
LKR5.24765	✓	✓	✓						✓		✓		A	A
LKR5.24866	✓	✓	✓	✓					✓		✓		A	A
LKR5.24867	✓	✓			✓				✓		✓		A	A
LKR5.39900	✓		✓				✓		✓		✓			
LKR5.24775	✓	✓	✓						✓		✓		B	B
LKR5.24876	✓	✓	✓	✓					✓		✓		C	C
LKR5.39901	✓		✓				✓		✓		✓			
LKR5.39902	✓		✓	✓			✓		✓		✓			
LKR5.24768	✓	✓	✓			✓			✓		✓		D	D
LKR5.39904	✓		✓			✓	✓		✓		✓			
LKR5.24779	✓		✓					✓			✓			
LKR5.24777	✓		✓					✓			✓			
LKR5.39910	✓		✓				✓	✓			✓			
LKR5.24778	✓		✓					✓			✓			